

Key-operated Fire Alarm Station

1534-1



Overview


The Edwards 1534-1 Key-operated Fire Alarm Station is ideal for use in buildings such as penal institutions or housing for the mentally handicapped, where ordinary pull stations would be operated maliciously. The 1534-1 station is fitted with a key-operated switch of which the key is not easily duplicated. Edwards 1534-1 Key-operated Stations use spanner head screws for mounting to the backbox. This further reduces tampering and deters unauthorized removal.

The 1534-1 has one Single Pole Normally Open contact rated for 1 amp at 24 Vdc. They feature 6 inch (150mm) wire leads for easy field wiring. They key can be removed in both the "ON" and "OFF" positions.

The oversize 6-1/8 inch x 7-1/8 inch (156mm x 181mm) faceplate is constructed using a 1/4 inch (6.3mm) thick clear lexan cover over steel faceplate finished in "Fire Red". English only markings are silkscreened in large white letters for high visibility.

The 1534-1 Station flush mounts to any standard North American 1-gang electrical box 2-1/2 inch (63mm) deep minimum, or surface mounts to Edwards Cat. Number 46292- 0200 Surface Mount Backbox. These backboxes are factory finished with a durable "Fire Red" baking enamel.

Typical Wiring

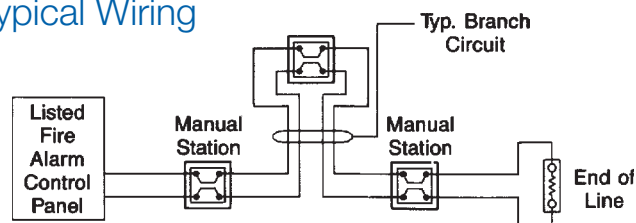



Detection & alarm since 1872

U.S.
T 888-378-2329
F 866-503-3996

Canada
Chubb Edwards
T 519 376 2430
F 519 376 7258

Southeast Asia
T : +65 6391 9300
F : +65 6391 9306

India
T : +91 80 4344 2000
F : +91 80 4344 2050

Australia
T +61 3 9239 1200
F +61 3 9239 1299

Europe
T +32 2 725 11 20
F +32 2 721 86 13


Latin America
T 305 593 4301
F 305 593 4300

utcfireandsecurity.com

© 2010 UTC Fire & Security.
All rights reserved.

Installation

Edwards recommends that these Key-operated Fire Alarm Stations always be installed in accordance with the latest recognized editions of local and national fire alarm codes.

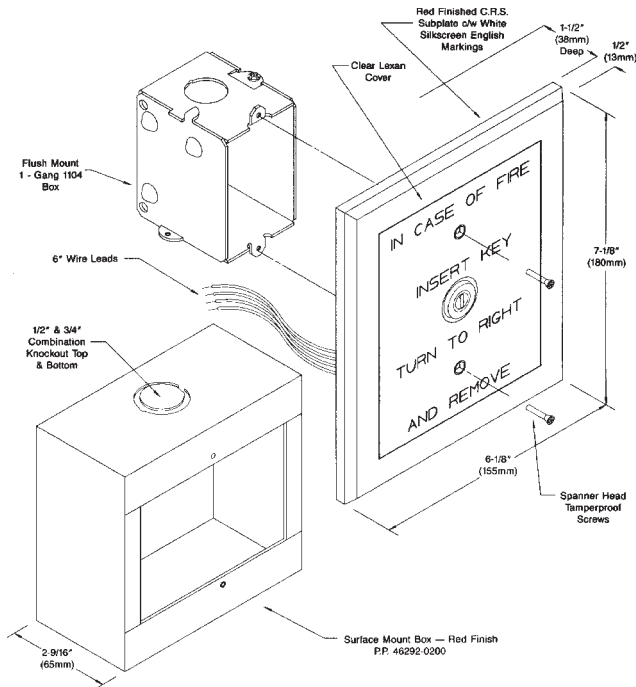

Specifications

Keyswitch Contacts	Single Pole Normally Open Rating: 1 amp at 24 Vdc
Wire Connection	6 inch (150mm) Wire Leads
Replacement Key	46151-0013 (Code C250)
Mounting	Flush to: One-gang 2-1/2 inch (63mm) deep standard North-American electrical box — 1104 style Surface to: Cat. No. 46292-0200 Surface Box
Frontplate	6-1/8 x 7-1/8 inches (156mm x 181mm) constructed using a 1/4 inch (6.3mm) thick Clear Lexan Cover over C.R.S. Faceplate finished in "Fire Red" English Only Markings Silkscreened In White
Operating Environment	Normal Indoor
Approvals	ULC—S528M, UL38, C.S.F.M.

Ordering Information

Catalog Number	Description	Shipping Weight
1534-1	Key-operated Fire Alarm Station — Normally Open	0.3 lb (0.6 lb)
46151-0013	Replacement Key — for 1534 -1 Station	0.2 lb (0.1 lb)
46292-0200	Surface Mount Box — Fire Red Finish	0.8 lb (0.35 lb)