

System Event Printer

PT-1S, PT-1P



Overview

The PT-1 series printers are high speed, 9-pin dot matrix type which use standard, continuous tractor feed computer paper. The PT-1 series printers are used to permanently record Life Safety System changes of state. All printed entries contain the date, time, event type and a user defined message for each printed event. The printer is required in proprietary type systems. In local, auxiliary or remote station systems the printer is ancillary and is optional. The printer must be backed up by a UPS in a proprietary system. Printer paper may be fed from the rear or bottom of the printer.

Standard Features

- High speed, bi-directional printing
- Serial (model PT-1S) or parallel (model PT-1P) interface
- Front panel setup
- Supports modems for remote installation
- Supports fiber optics module
- LED Status indicators
- RS-232 direct cable
- Printer self-test mode

Application

The PT-1S (serial, RS-232 interface) is used when connecting to the CM1(N), CM2N, FCCD, 2-MCM or 3-CPU1. The PT-1P (Parallel interface) is used when the printer is connected to the VDU-3, CCA-1/4/8 or the CGP-1/4/8.

Installation

The printer comes from the factory with all DIP switches and operating modes setup for proper operation with the system. The baud rate in some instances may have to be adjusted to provide reliable transmission over long distances. When configuring a system to meet the requirements of proprietary, the printer must be located adjacent to the Fire Command Center.

When the printer is located greater than 50 ft (15.2 m) from the Fire Command Center, Short Haul Modems (model SHM-M1 or SHM-F1) may be used. Short Haul Modems will allow distances up to 5 miles (8 km) @ 2400 Baud. When Short Haul Modems are used the printer is considered ancillary and the connection is not supervised.

When the SHM modules are used with the CM1(N) or CM2N an IOP3A module must be used to properly power the modules. The IOP3A may be located on the inside of the Fire Command Center enclosure.



Detection & alarm since 1872

U.S.
T 888-378-2329
F 866-503-3996

Canada
Chubb Edwards
T 519 376 2430
F 519 376 7258

Southeast Asia
T : +65 6391 9300
F : +65 6391 9306

India
T : +91 80 4344 2000
F : +91 80 4344 2050

Australia
T +61 3 9239 1200
F +61 3 9239 1299

Europe
T +32 2 725 11 20
F +32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300


utcfireandsecurity.com

© 2010 UTC Fire & Security.
All rights reserved.

Engineering Specifications

The event and status printer shall be a 9-pin, impact, dot matrix printer with a minimum print speed of 232 characters per second. Print parameters shall be set up with a menu drive program in the printer. The printer shall be capable of serial or parallel communications protocol. The communications speed for RS-232 communications protocol shall be adjustable from 300 to 9600 Baud. The serial or parallel cable shall be supervised. The serial printer shall support Short Haul Modems. The printer shall list the time, date, type and user defined message for each event printed.

Connection Diagram

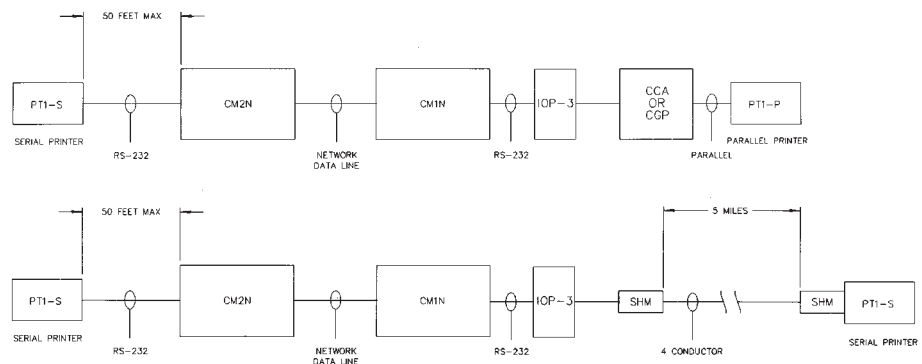

Specifications

Print Speed	232 cps
Voltage	120 Vac, $\pm 10\%$ 220/240 Vac, $\pm 10\%$
Power rating	48VA
Frequency	50/60 Hz
MTBF	4000 Hrs @ 25% duty cycle
Size	14.2 x 10.8 x 3.2 inches 36.1 x 27.4 x 8.1 cm
Weight	9.9 lbs (4.5 kg)
Agency Listings	UL, ULC, MEA, CSFM
Operating Environment	Temperature: 32° - 120°F (0° - 49°C). Humidity: 85% non-condensing

Ordering Information

Model	P/N	Description
PT-1S	360038	Serial Printer
PT-1P	360039	Parallel Printer
PT-1S/220	360070	Serial Printer-220/240 Vac
PT-1P/220	360071	Parallel Printer-220/240 Vac

Related Parts Ordering Information

SHM-M1	360024	Short Haul Modem with male DB-25 connector
SHM-F1	360025	Short Haul Modem with female DB-25 connector
IOP3A	130117	Isolated I/O port card