

Hazardous Location Bells

438DEX-N5 & 439DEX-AW



Overview

430D series of hazardous location bells are diode-polarized, heavy duty fire bells for use in life safety applications where a diode supervised signal is required.

Hazardous location bells are available with 6-inch (152 mm), 8-inch (203 mm) or 10 inch (254mm) gongs, for either 120 Vac or 24 Vdc operation. They can be mounted to any solid surface using two 3/8 inch (10 mm) bolts and the supplied mounting brackets or to a rigid conduit. The integral explosion-proof housing is mechanically terminated to accept a standard 3/4-inch -14 National Pipe Taper (NPT) nipple.

Standard Features

- Diode polarized
- 6", 8", and 10" gong sizes
- Low power drain for efficient operation over long wire runs
- Completely assembled

Application

430D series of hazardous location bells are UL-listed for installation in the following classified locations:

- Class I groups B, C and D
- Class II groups E, F and G
- Class III hazardous locations, for Div. 1 and 2



Detection & alarm since 1872

U.S.
T 888-378-2329
F 866-503-3996

Canada
Chubb Edwards
T 519 376 2430
F 519 376 7258

Southeast Asia
T : +65 6391 9300
F : +65 6391 9306

India
T : +91 80 4344 2000
F : +91 80 4344 2050

Australia
T +61 3 9239 1200
F +61 3 9239 1299


Europe
T +32 2 725 11 20
F +32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

utcfireandsecurity.com

© 2010 UTC Fire & Security.
All rights reserved.

Mounting

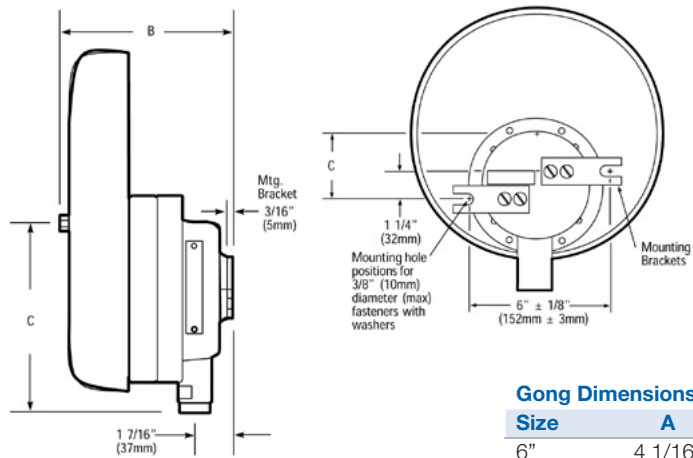

Gong Dimensions

Size	A	B	C
6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
8" (203mm)	5 1/16" (129mm)	5 1/4" (133mm)	1 5/8" (41mm)
10" (245mm)	6 1/16" (154mm)	5 3/8" (137mm)	2 5/8" (67mm)

Specifications

	438DEX-xN5	439DEX-xAW
Rated Voltage	120 Vac	24 Vdc
Alarm Current	.041A (RMS)	0.24A
Sound output	83 dBA measured in an anechoic chamber on an "A" weighted decibel scale at 10 ft (3m)	

Ordering Information

Catalog Number	Description	Ship Wt. lb. (kg.)
439DEX-6AW-R	6" (152 mm) Hazardous Location Bell – 24 Vdc	8 (3.6)
439DEX-8AW-R	8" (203 mm) Hazardous Location Bell – 24 Vdc	10 (4.5)
439DEX-10AW-R	10" (254 mm) Hazardous Location Bell – 24 Vdc	12 (5.4)
438DEX-6N5	6" (152 mm) Hazardous Location Bell – 120 Vac	8 (3.6)
438DEX-8N5	8" (203 mm) Hazardous Location Bell – 120 Vac	10 (4.5)
438DEX-10N5	10" (254 mm) Hazardous Location Bell – 120 Vac	12 (5.4)