
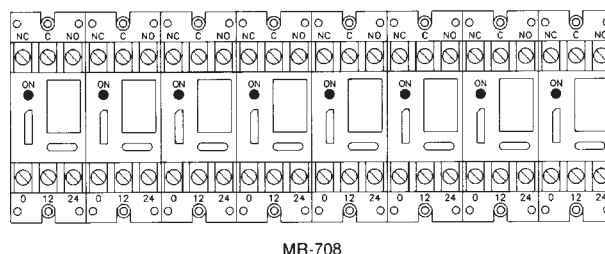



Multi-Voltage Control Relays

MR-700 Series



Overview

The MR-700 Series relays offers SPDT 10 Amp contacts which may be operated by one of four input control voltages: 12 Vdc, 12 Vac, 24 Vdc, or 24 Vac. Each relay position contains a high intensity LED which, when illuminated, indicates the relay coil energized.

Individual relays may be "snapped apart" from a standard eight-position module.

Relays are equipped with either mounting spacers or track mounting hardware.

These devices are ideal for applications where contacts are required for control of electrical loads or general purpose switching. They are suitable for use with HVAC, Temperature Control, Fire Alarm, Security, Energy Management, and Lighting Control Systems.

Standard Features

- Each relay position may be energized from one of four input voltages
- Each relay position contains a red LED which illuminates when the coil is energized.
Provides a timesaving convenience when checking an installed system; no metering is required
- From one to eight relay modules may be formed by "snapping apart" desired positions
- Compact 10 AMP SPDT contacts
- Choice of metal spacers or plastic track for mounting
- UL recognized components



Detection & alarm since 1872

U.S.
T 888-378-2329
F 866-503-3996

Canada
Chubb Edwards
T 519 376 2430
F 519 376 7258

Southeast Asia
T : +65 6391 9300
F : +65 6391 9306

India
T : +91 80 4344 2000
F : +91 80 4344 2050

Australia
T +61 3 9239 1200
F +61 3 9239 1299


Europe
T +32 2 725 11 20
F +32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

utcfireandsecurity.com

© 2010 UTC Fire & Security.
All rights reserved.

Wiring

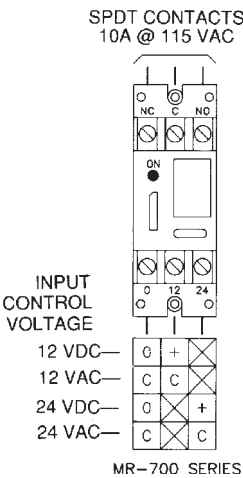

Specifications

Power Requirements	30 mA per position @ 12 Vdc, 12 Vac, 24 Vdc, 24 Vac
Relay	UL Recognized SPDT
Contact Rating	10 Amps @ 115 Vac
Ambient Temperature	-58°F to 185°F (-50°C to 85°C)
Approvals	UL Recognized componets

Dimensions	
MR-701	3.25 H x 1.062 W x 1.0 D in (82.6 H x 27 W x 25.4 D mm)
MR-704	3.25 H x 4.25 W x 1.0 D in (82.6 H x 108 W x 25.4 D mm)
MR-708	3.25 H x 8.5 W x 1.0 D in (82.6 H x 216 W x 25.4 D mm)

Ordering Information

Model	Description
MR-701/S	Single SPDT relay with LED and mounting spacers
MR-701/T	Single SPDT relay with LED and track mounting hardware
MR-704/S	Four-position SPDT relay with LED and mounting spacers
MR-704/T	Four-position SPDT relay with LED and track mounting hardware
MR-708/S	Eight-position SPDT relay with LED and mounting spacers
MR-708/T	Eight-position SPDT relay with LED and track mounting hardware